

PROVEN PERFORMER

Compact Commercial Laundry

LWS42 (top loading washer), LES37 (electric dryer), LDG3TR (gas dryer)

Top loading washer features

- Extra large capacity stainless steel tub keeps clothes looking their best
- Advanced suspension system reduces the possibility of an unbalanced load
- Commercial quality transmission offers highest reliability and durability
- · Multi-cycle controls provide washing options to fit your laundry needs
- Large lid opening for easy loading

Single dryer features

- Durable galvanized steel cylinder with an extra-large 198 litres of volume
- Efficient dryer heating with 21 MJ (gas models) and up to 4,000 Watts (electric models)
- Large, easy-to-clean lint compartment
- Reversible door
- 1,913.8cm² door opening is the largest in the industry, providing easy loading and unloading
- Optional venting positions





OPENING





FASY OPERATION

STAINI ESS STEEL WASHER DRUM

I OW ENERGY CONSUMPTION



Controls

Top loading washer E-Mech control

The E-Mech control features a straightforward design that offers users simple water temperature and fabric selections.

Single dryer E-Mech control

The E-Mech control features a straightforward design that offers users simple drying selections.





LWS42

LES37, LDG3TR



SPEED QUEEN. WORLD NO.1 IN COMMERCIAL LAUNDRY




	LWS42	LES37 (Electric) LGS37 (Gas)				
Туре	Top Loading Washer	Single Dryer				
Control	Emech	Emech				
Control location	Rear	Rear				
Drum						
Capacity kg	8 kg	9 kg				
Cylinder volume litres	92.3 Lt	198 Lt				
Widthmm	650	683				
Depth mm	711	711				
Height mm	1092	1092				
Drum speed						
Spin speed G-Force	150	n/a				
Spin speed rpm	710	n/a				
Motor						
Motor size kW	0.37	0.25				
Cabinet						
Cylinder finish	White	White				
Colours	White	White				
Door type (solid/window)	n/a	Solid				
Heating						
Heat sources	n/a	Electric or Gas, LPG optional				
Heating element (Electric W)	n/a	4000				
Connection						
Gas inlet connection mm	n/a	9.5				
Gas consumption MJ/Hr	n/a	21.09 MJ				
Exhaust outlet dia. mm	n/a	102				
Exhaust airflow litres/sec	n/a	85				
Water temperatures	3	n/a				
Operation						
Cycles	Regular, Delicate, Permanent Press, Spin	Regular, Perm Press, Delicate, Time Dry, No Heat				
Water consumption per cycle litres	92.2	n/a				
Water pressure kPa	140/830 kPa	n/a				
Power						
Electrical requirements (voltage/Hz/Ph)	240/50/1, 5 amp	240/50/1, Electric 20 amp, Gas 4 amp				
Transport data						
Net weight kg	82	Electric/Gas 59/61				
Shipping weight kg	88	Electric/Gas 64/66				
Dimensions H×W×D mm	1092×650×711	1092×683×711				
Packing dimensions H×W×D mm	1124×699×762	1156×737×832				
Agency approvals						
Available agency approvals	Electric SAA	Electric SAA, Gas AGA #4946				




Dimensions

Top Loading Washer

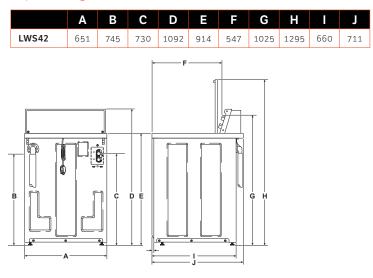

Electric Dryer


	А	В	С	D	Е	F	G	Н	I	J	К	L	М
LES37	589	914*	1036*	1092*	391	392*	683	102	10	711	114*	203	597

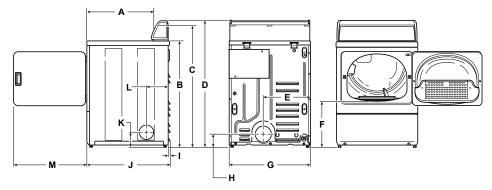



iii

Gas Dryer

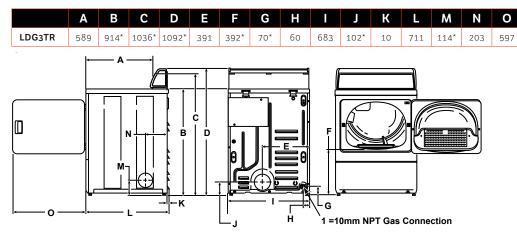

All measurements are in mm. *With levelling legs turned into base. NOTE: Exhaust openings are 102 mm metal ducting.

