LTGE5A Commercial Washer/Dryer

10KG FRONT LOAD WASHER AND STACKED 10KG GAS DRYER

Features and Benefits

- Low water consumption of only 44.3 litres per wash on a standard cycle with NO additional options selected with the full wash completed in 30 minutes.
- Pre-Wash and extra rinse option for heavily soiled loads.
- Energy saving 'High Speed Extract' spin cycle of 1,200 rpm producing 'G' forces in excess of 440 for greater water removal, resulting in reduced drying times and associated energy savings.
- 100% front service dryer.

SPECIFICATIONS

DIMENSIONS	
CAPACITY	10 kg washer, 10 kg dryer
WIDTH	683 mm
DEPTH	704 mm
HEIGHT	1,986 mm
NET WEIGHT	177 kg
OPERATION	
WASHER CYCLES	6 Cycles, 3 Soil Levels
DRYER CYLES	6 Cycles, 3 Fabric Temperatures
LIGHTS CONTROLS	Yes & Timer Display
ACTIVATION	Electronic E MECH
WATER TEMPERATURE	Hot, warm or cold
MOTOR WASHER SPIN	1 hp, variable speed
SPEED WASHER	500 - 1,200 rpm, variable speed
WATER USE WASHER	44.3 litres / wash standard cycle
HEAT INPUT DRYER	21.9 mj natural gas or LPG
CONSTRUCTION	
DRUM WASHER	Stainless steel
OUTER BOWL WASHER	Stainless steel
OUTER CABINET	Steel
DRUM DRYER	Galvanised

LTGE5A Commercial Washer/Dryer

TECHNICAL SPECIFICATIONS

UTILITIES WASHER
10 AMP SINGLE PHASE 240 V 50 HZ
10 AMP CIRCUIT-BREAKER REQUIRED
1.8 M POWER CORD
HOT AND COLD WATER CONNECTIONS REQUIRED
1.2 M HOT AND COLD WATER HOSES SUPPLIED
WATER SUPPLY HOSE TAP **ENDS ¾** BSP THREADS
MAX HOT WATER CONSUMPTION 31 LITRE / CYCLE (INC PRE-WASH)
MAX WATER CONSUMPTION 74.2 LITRE / CYCLE
MAX POWER DRAW 750 W / HR
DRAIN: 610 - 914 MM UPSTAND, 50 MM DIAMETER
WATER SUPPLY PRESSURE BETWEEN 140 KPA/825 KPA

UTILITIES DRYER	
10 AMP SINGLE PHASE	240 V 50 Hz
10 AMP	Circuit-breaker required
1.8 M	Power Cord
FLUE DIAMETER	102 mm (4 in)
AIR FLOW	85 litres / second
MAX POWER DRAW	4,000 w / hour
OPTIONAL	Right or left side venting

SHIPPING DIMENSIONS	
WEIGHT	193 kg
HEIGHT	2,032 mm
WIDTH	737 mm
DEPTH	832 mm
	1.25 m^3

A)	*1678 mm	B)	*1447 mm	C)	597 mm	D)	213 mm	E)	610 mm
F)	203 mm	G)	391 mm	H)	59 mm	I)	*938 mm	J)	*368 mm
K)	*1140 mm	L)	*813 mm	M)	683 mm	N)	*1184 mm	O)	*1986 mm
P)	52 mm	Q)	704 mm	R)	38 mm	S)	*333 mm		

* With Leveling Legs Turned into Base.

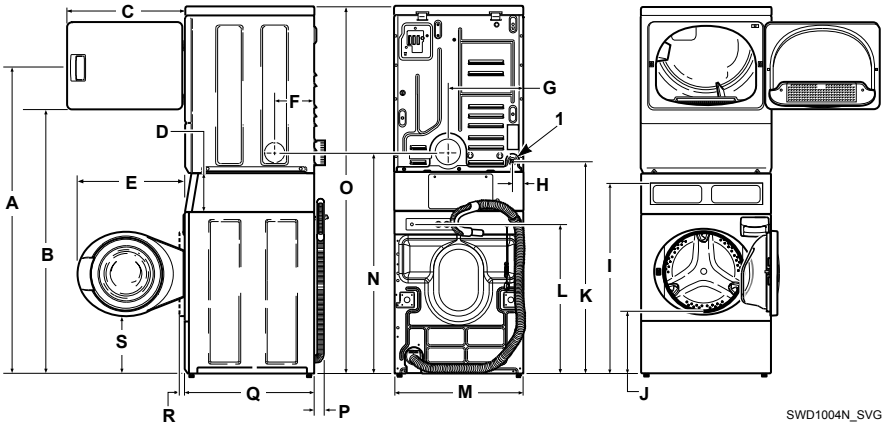

Speed Queen