

Speed Queen®

STEBXA Commercial Washer / Dryer



Specifications:

Dimensions

Capacity	9.5 kg washer, 9 kg dryer
Width	683 mm
Depth	704 mm
Height	1,986 mm
Net weight	177 kg

Operation

Cycles	5 Wash Cycles - 4 Dry Cycles
Cycle lights	Yes
Cycle time	26 - 30 minutes
Controls	Touch push button controls
Activation	Push to start multi cycle control
Water temperature	Cold, Warm or Hot
Motor (washer) Spin speed (washer)	1 hp, variable speed 500 - 1,200 rpm, variable speed
Water use (washer)	44.3 litres / wash
Heat input (dryer)	4,200 w

Construction

Drum (washer)	Stainless steel
Outer bowl (washer)	Stainless steel
Outer casing	Steel
Drum (dryer)	Galvanized steel


9.5 kg Front load washer and stacked 9 kg dryer STEBXA

Features and benefits:

- ✓ Low water consumption of only 44.3 litres per wash with full wash completed in 30 minutes.
- ✓ Energy saving 'High Speed Extract' spin cycle of 1,200 rpm producing 'G' forces in excess of 440 for greater water removal, resulting in reduced drying times and associated energy savings.
- ✓ 100% front service dryer.
- ✓ Touch push button controls robust and easy to use controls suitable for high volume multiple operator applications.

www.sqcommercial.com.au

Equipment dimensions:

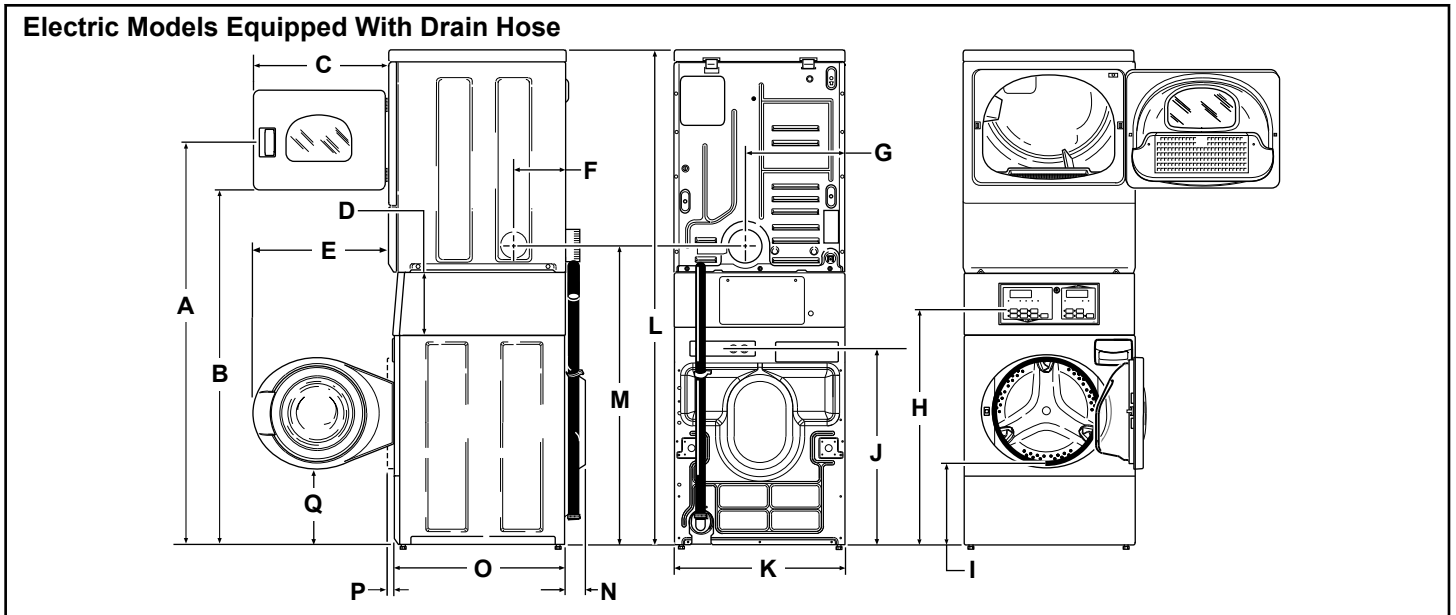

A: 1,678* mm	B: 1,447* mm	C: 597 mm	D: 213 mm
E: 610 mm	F: 203 mm	G: 391 mm	H: 938* mm
I: 368* mm	J: 813* mm	K: 683 mm	L: 1,986* mm
M: 1,148* mm)	N: 52 mm	O: 704 mm	

* With Leveling Legs Turned Into Base.

9.5 kg Front load washer and stacked 9 kg dryer STEBXA

Technical specifications:

Utilities washer

- ✓ 10 amp Single phase 240 V 50 Hz
- ✓ 10 amp Breaker required
- ✓ 1.8 m Flex supplied fitted
- ✓ Hot and cold water supply
- ✓ 1.2 m Hot and cold water hoses supplied
- ✓ Water supply hose tap ends ¾ BSP threads
- ✓ Max hot water consumption 15 litre / cycle
- ✓ Max water consumption 44.3 litre / cycle
- ✓ Max power draw 750 w / hr
- ✓ Drain: 610 - 914 mm upstand, 40 mm diameter
- ✓ Water supply pressure between 138 - 827 kPa

Utilities dryer

- ✓ 20 amp Single phase 240 V 50 Hz
- ✓ 20 amp Breaker required
- ✓ 1.8 m Flex supplied fitted
- ✓ Flue diameter 102 mm (4 in)
- ✓ Air flow 85 litres / second
- ✓ Max power draw 4,200 w / hour
- ✓ Optional right or left side venting

Shipping dimensions

- ✓ Weight 193 kg
- ✓ Height 2,032 mm
- ✓ Width 737 mm
- ✓ Depth 832 mm
- ✓ 1.31 m³